

## Technical Data VACUDEST XS

52,500 – 80,000 gal industrial wastewater per year

- VACUDEST Modular-System – Customized systems
- Energy efficient due to 95 % energy recycling
- Cost efficient due highest evaporation rates
- Comfortable Vacutouch control system including internet connection
- State of the art technology stands for highest distillate quality

# VACUDEST XS

## VACUDEST Modular-System – Features

- Destcontrol to further improve distillate quality
- e-service, internet connection of Vacutouch control system
- Maintenance friendly design to optimize system availability




## Technical Data

VACUDEST	annual capacity*	Reference capacity with pure water	Average capacity with wastewater*	Electrical load	Weight (empty)	Energy consumption starting from
XS 200	52,500 gal	9 gal/h	7 gal/h	5,5 kW	860 lb	0.25 kWh/gal
XS 300	80,000 gal	13 gal/h	10 gal/h	5,5 kW	930 lb	0.25 kWh/gal

\* 8,000 hours of operation, 5 % average evaporation residue of the wastewater

## Dimensions (inch)

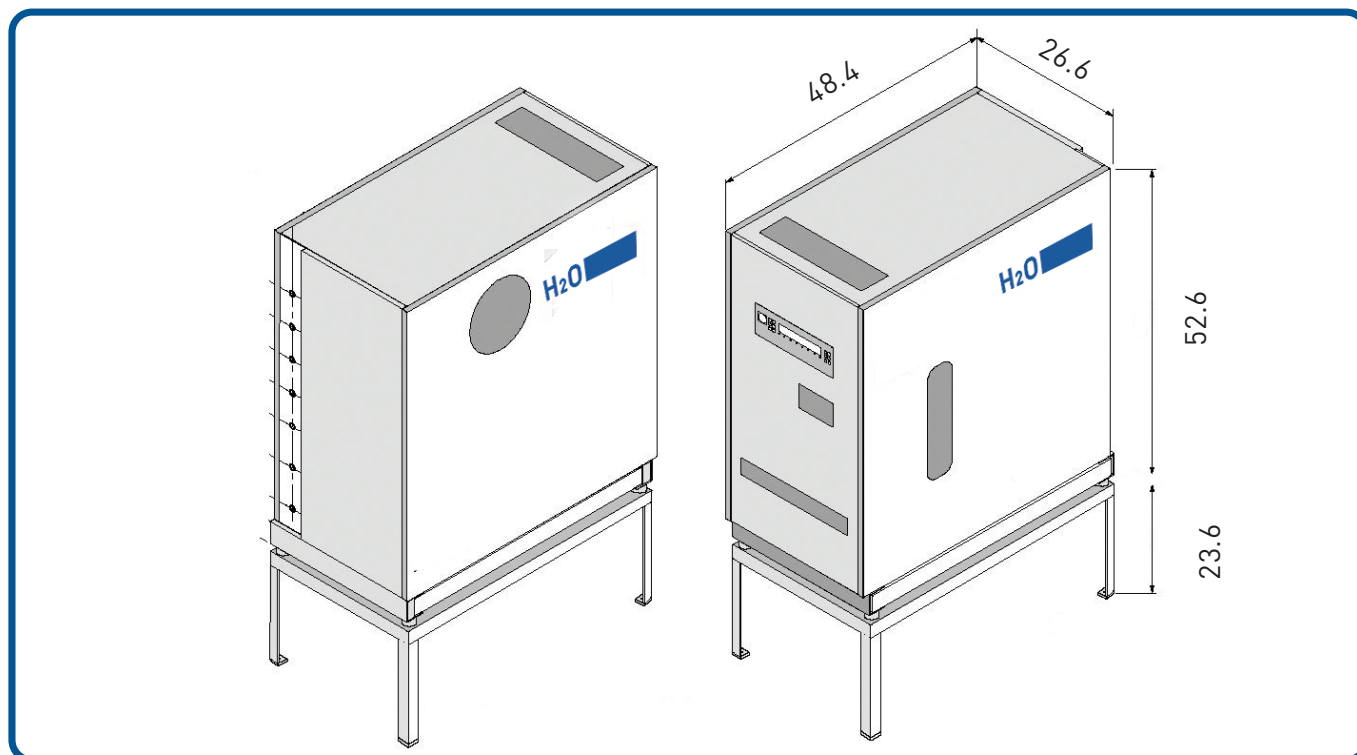

Dimensions of the VACUDEST vacuum distillation systems with optimal maintenance space

Copyright © H2O GmbH 2019 US-DB-11/2019